


Polyester laminate

Laminate delivered in panel



LAMILIT

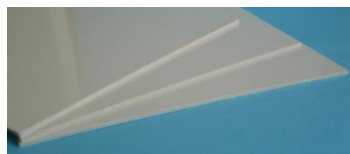

Laminate with polyester resin
reinforced with glass fibres

Thicknesses and weights

Thickness in mm	3	4	5
Weights kg/m2 FEUBL	4,8	6,4	8,1

Advantages :

Excellent surface aspect with gelcoat on both sides.

Types / glass reinforcement :

3 mm: 1520 g/m2

4 mm: 2110 g/m2

5 mm: 2610g/m2

Dimensions :

Standard height: 2440mm

Maximum height: 2660mm

Length: up to 13 550 mm flat.

Special sizes: upon request.

Upon specific request :

Coloured panels.

Special cuts according to customer's drawings.

Panels protected with plastic film.

Applications : sandwich panels, inside or outside protection of trailers walls and other, partition wall and roof.

